


Accentlight, Open Aperture Extendable Lampholder



MR16

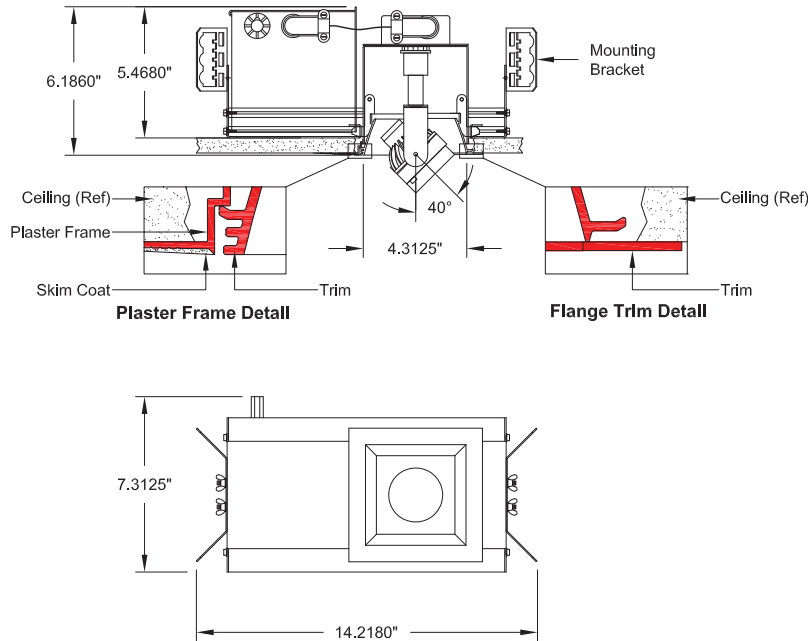

Ceiling Cut-out : 5.0000" x 5.0000" Trim Flange : 5.5625" x 5.5625" Aperture: 4.3125" x 4.3125"

Trim Type	-1-M6	Wattage	-	Trim Finish	/B-EX-	Voltage
Trim Type		Wattage		Trim Finish		Voltage
<input type="checkbox"/> VAP Plaster		<input type="checkbox"/> 20		<input type="checkbox"/> W White		<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange		<input type="checkbox"/> 37		<input type="checkbox"/> B Black		<input type="checkbox"/> 2 (277V)
		<input type="checkbox"/> 50				

Description

Recessed open aperture accent fixture. Adjustable and extendable lampholder. Extends 1.25" below aperture. One MR16 lamp. Flanged or plaster frame trim.

Features

- Standard Lens: Clear
- Below ceiling access to the transformer and wiring.
- Lampholder is adjustable from 0°-40°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: 14.218"L x 7.312"W x 5.468"H
Weight: Approx. 10 lbs.
Ceiling Cutout: 5"L x 5"W

Electrical

- Power Consumption: 50 watts max.
- Ambient temperature 100 °F. maximum.
- Integral toroidal transformer.
- Through branch wiring capable.

Mounting

Universal mounting brackets included. Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3


Photometry: Page 2



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

Accentlight, Open Aperture Extendable Lampholder

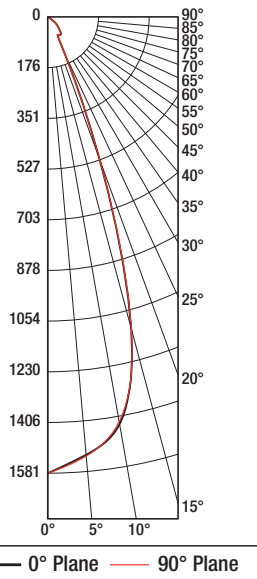


1 Lamp Photometrics

50 Watt MR16, 38° Flood

Clear Lens

Lampholder Position: Retracted

Photometry reports for other fixture configurations, consult factory

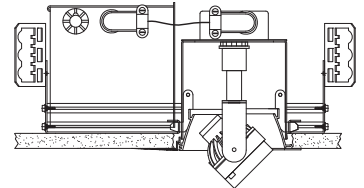

Total Luminaire Efficiency: 78.00%

Candela Distribution

	0	15	30	45	60	75	90
0	1581	1581	1581	1581	1581	1581	1581
5	1523	1530	1529	1529	1528	1532	1528
10	1432	1430	1425	1432	1427	1427	1424
15	1117	1123	1120	1121	1123	1117	1121
20	525	523	525	526	525	527	528
25	129	130	129	129	129	129	128
30	73	72	72	72	71	72	72
35	76	76	76	76	76	75	77
40	70	70	70	70	70	71	71
45	51	51	51	51	51	51	51
50	40	40	40	40	39	40	40
55	20	21	20	20	21	21	20
60	6	6	6	6	6	6	6
65	2	2	2	2	2	2	2
70	1	1	1	1	1	1	1
75	0	0	0	0	0	0	0
80	0	0	0	0	0	0	0
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

5	73
10	136
15	159
20	98
25	30
30	20
35	24
40	25
45	20
50	17
55	9
60	3
65	1
70	0
75	0
80	0
85	0
90	0

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	94	94	94	94	92	92	92	92	88	88	88	84	84	84	81	81	81	79
1	90	88	87	85	88	87	85	84	83	82	81	81	80	79	76	76	76	75
2	87	83	81	78	85	82	79	77	79	77	76	77	76	74	72	72	72	71
3	83	79	75	73	82	78	75	72	76	73	71	74	72	70	68	68	68	68
4	80	75	71	68	79	74	71	68	72	69	67	71	68	66	65	65	65	65
5	77	71	68	65	76	71	67	64	69	66	64	68	65	63	62	62	62	62
6	74	68	64	61	73	68	64	61	67	63	61	65	63	61	59	59	59	59
7	71	65	61	59	70	65	61	59	64	61	58	63	60	58	57	57	57	57
8	69	63	59	56	68	62	59	56	62	58	56	61	58	56	55	55	55	55
9	67	60	57	54	66	60	56	54	59	56	54	59	56	54	53	53	53	53
10	65	58	55	52	64	58	54	52	57	54	52	57	54	52	51	51	51	5

VA-1-M6

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.