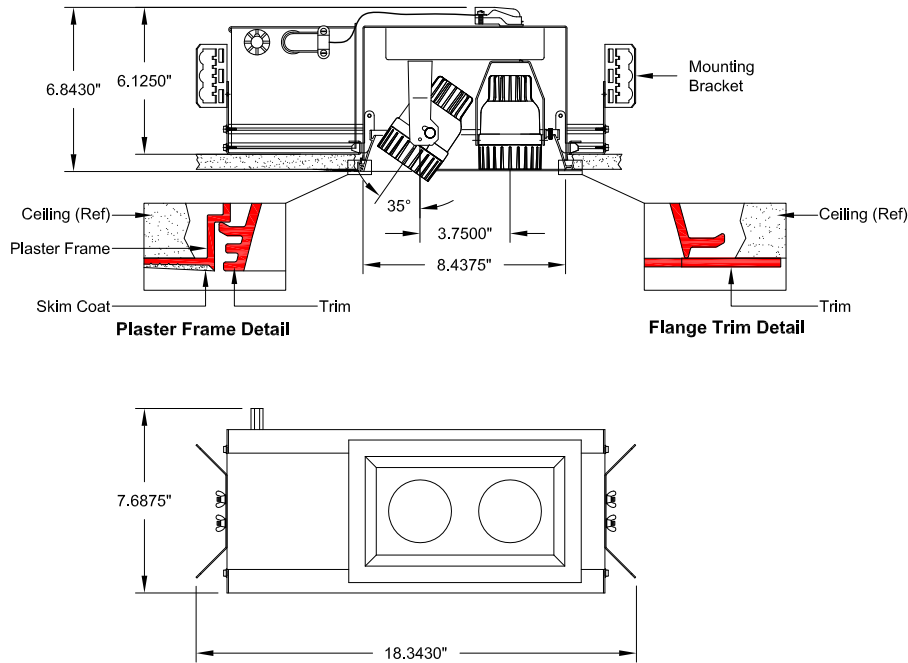


Accentlight, Open Aperture Adjustable Lampholder



MR16 MH



Ceiling Cut-out : 5.3750" x 9.1250"

Trim Flange : 5.9375" x 9.6875"

Aperture: 4.6875" x 8.4375"

-2-M6M - /B-AD-

Trim Type	Wattage	Trim Finish	Voltage
<input type="checkbox"/> VAP Plaster	<input type="checkbox"/> 20	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange	<input type="checkbox"/> 39	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)

Description

Recessed open aperture metal halide accent fixture. Adjustable lampholders. Two MR16 MH lamps. Flanged or plaster frame trim.

Features

- Below ceiling access to the ballast and wiring.
- Lampholders are adjustable from 0°-35°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: 18.343"L x 7.687"W x 6.125"H
 Weight: Approx. 14 lbs.
 Ceiling Cutout: 9.125"L x 5.375"W

Electrical

- Power Consumption: 78 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast.
- Through branch wiring capable.

Mounting

Universal mounting brackets included.
 Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3


Photometry: Page 2



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

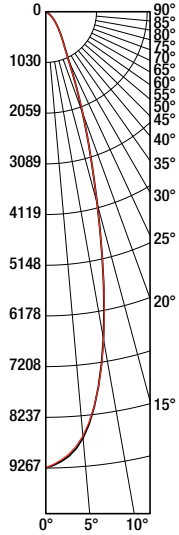Accentlight, Open Aperture Adjustable Lampholder




— 0° Plane — 90° Plane

2 Lamp Photometrics

39 Watt MR16 Metal Halide, 25° Flood

Clear Lens

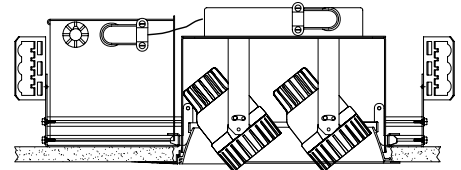Photometry reports for other fixture configurations, consult factory



Total Luminaire Efficiency: 72.80%

Candela Distribution

	0	15	30	45	60	75	90
0	9267	9267	9267	9267	9267	9267	9267
5	8688	8651	8718	8667	8664	8708	8646
10	6742	6757	6792	6745	6776	6752	6770
15	4032	4032	4017	4003	4005	4025	4017
20	2179	2176	2175	2190	2198	2206	2196
25	1121	1130	1120	1113	1117	1109	1100
30	701	700	694	699	697	698	693
35	488	485	486	481	487	486	484
40	345	351	346	346	348	349	344
45	238	236	240	240	237	236	237
50	158	160	158	155	160	157	156
55	96	94	96	96	96	97	95
60	48	49	48	49	48	50	48
65	19	18	18	18	18	17	18
70	5	5	5	5	5	5	5
75	2	2	2	2	2	2	2
80	1	0	0	0	1	1	1
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

	5	415
10	644	
15	570	
20	410	
25	259	
30	191	
35	153	
40	122	
45	92	
50	66	
55	43	
60	23	
65	9	
70	3	
75	1	
80	0	
85	0	
90	0	

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	87	87	87	87	85	85	85	85	81	81	81	78	78	78	75	75	75	73
1	84	82	80	79	82	80	79	78	77	76	75	75	74	73	71	71	71	70
2	80	77	75	72	79	76	74	72	74	72	70	71	70	69	67	67	67	66
3	77	73	70	67	76	72	69	67	70	68	66	68	66	65	63	63	63	63
4	74	69	66	63	73	68	65	63	67	64	62	65	63	61	60	60	60	59
5	71	66	62	59	70	65	62	59	64	61	59	63	60	58	57	57	57	57
6	68	63	59	56	67	62	59	56	61	58	56	60	57	55	54	54	54	54
7	66	60	56	54	65	60	56	54	59	56	53	58	55	53	52	52	52	52
8	63	58	54	51	63	57	54	51	56	53	51	56	53	51	50	50	50	50
9	61	55	52	49	61	55	52	49	54	51	49	54	51	49	48	48	48	48
10	59	53	50	47	59	53	50	47	53	49	47	52	49	47	46	46	46	4

VA-2-M6M

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.