


Accentlight, Open Aperture Extendable Lampholder



MR16

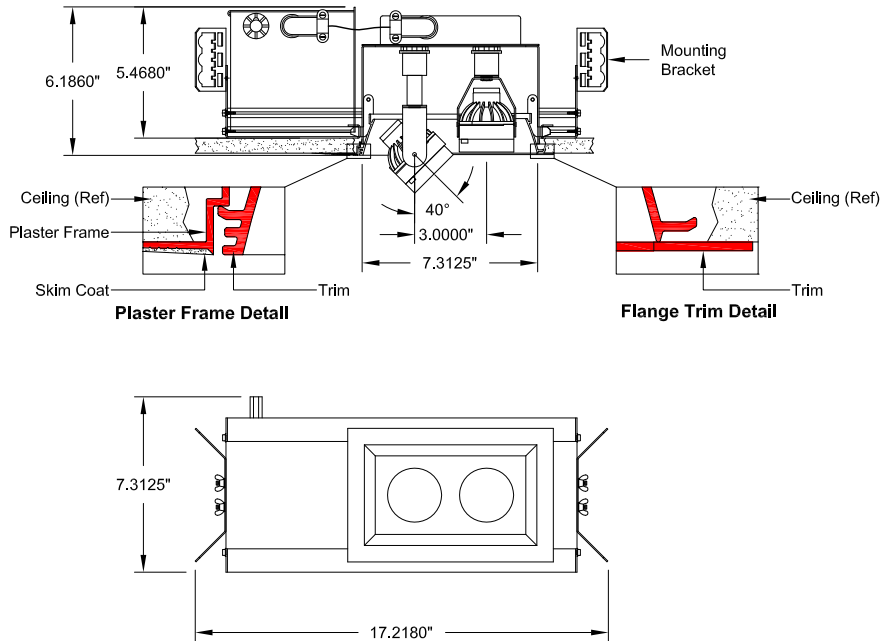

Ceiling Cut-out : 5.0000" x 8.0000"

Trim Flange : 5.5625" x 8.5625"

Aperture: 4.3125" x 7.3125"

Trim Type	-2-M6	Wattage	-	Trim Finish	/B-EX-	Voltage
<input type="checkbox"/> VAP Plaster		<input type="checkbox"/> 20		<input type="checkbox"/> W White		<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange		<input type="checkbox"/> 37		<input type="checkbox"/> B Black		<input type="checkbox"/> 2 (277V)
		<input type="checkbox"/> 50				

Description

Recessed Open aperture accent fixture. Adjustable and extendable lampholders. Extends 1.25" below aperture. Two MR16 lamps. Flanged or plaster frame trim.

Features

- Standard Lens: Clear
- Below ceiling access to the transformer and wiring.
- Lampholders are adjustable from 0°-40°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: 17.218"L x 7.312"W x 5.468"H
Weight: Approx. 12 lbs.
Ceiling Cutout: 8"L x 5"W

Electrical

- Power Consumption: 100 watts max.
- Ambient temperature 100 °F. maximum.
- Integral toroidal transformer.
- Through branch wiring capable.

Mounting

Universal mounting brackets included.
Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3

Photometry: Page 2




All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

Accentlight, Open Aperture Extendable Lampholder



MR16

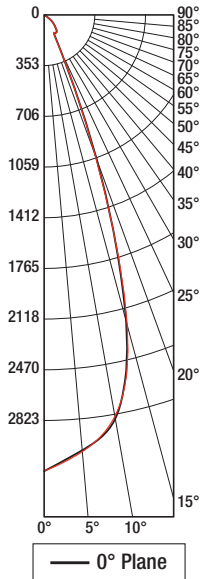


2 Lamp Photometrics

50 Watt MR16, 38° Flood

Clear Lens

Lampholder Position: Retracted

Photometry reports for other fixture configurations, consult factory

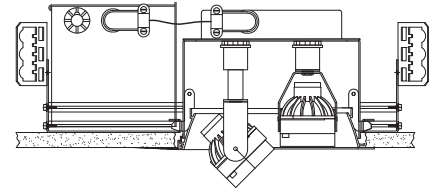

Total Luminaire Efficiency: 77.40%

Candela Distribution

	0	15	30	45	60	75	90
0	3176	3176	3176	3176	3176	3176	3176
5	3042	3053	3059	3059	3045	3050	3051
10	2851	2827	2830	2842	2845	2860	2837
15	2207	2208	2221	2216	2223	2234	2236
20	1055	1047	1049	1053	1048	1045	1038
25	270	269	267	265	262	256	256
30	145	145	145	143	145	144	142
35	149	148	149	150	149	150	150
40	134	138	136	136	137	135	137
45	101	99	99	99	100	98	98
50	76	76	77	78	77	75	75
55	38	38	39	38	38	38	38
60	11	11	11	11	11	11	11
65	4	4	4	4	4	4	4
70	1	1	1	1	1	1	1
75	0	0	0	0	0	0	0
80	0	0	0	0	0	0	0
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

5	146
10	270
15	315
20	197
25	61
30	39
35	47
40	48
45	38
50	32
55	17
60	5
65	2
70	1
75	0
80	0
85	0
90	0

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	93	93	93	93	91	91	91	91	87	87	87	83	83	83	80	80	80	78
1	89	88	86	84	88	86	84	83	83	82	81	80	79	78	76	76	76	75
2	86	83	80	78	84	81	79	77	79	77	75	77	75	74	72	72	72	71
3	82	78	75	72	81	77	74	72	75	73	71	73	71	70	68	68	68	67
4	79	74	71	68	78	73	70	68	72	69	67	70	68	66	65	65	65	64
5	76	71	67	64	75	70	67	64	69	66	63	68	65	63	62	62	62	61
6	73	68	64	61	72	67	64	61	66	63	61	65	62	60	59	59	59	59
7	71	65	61	58	70	64	61	58	64	60	58	63	60	58	57	57	57	56
8	68	62	59	56	68	62	58	56	61	58	56	61	58	55	54	54	54	54
9	66	60	56	54	65	60	56	54	59	56	54	58	56	53	52	52	52	52
10	64	58	54	52	63	58	54	52	57	54	52	57	54	52	51	51	51	5

VA-2-M6

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.