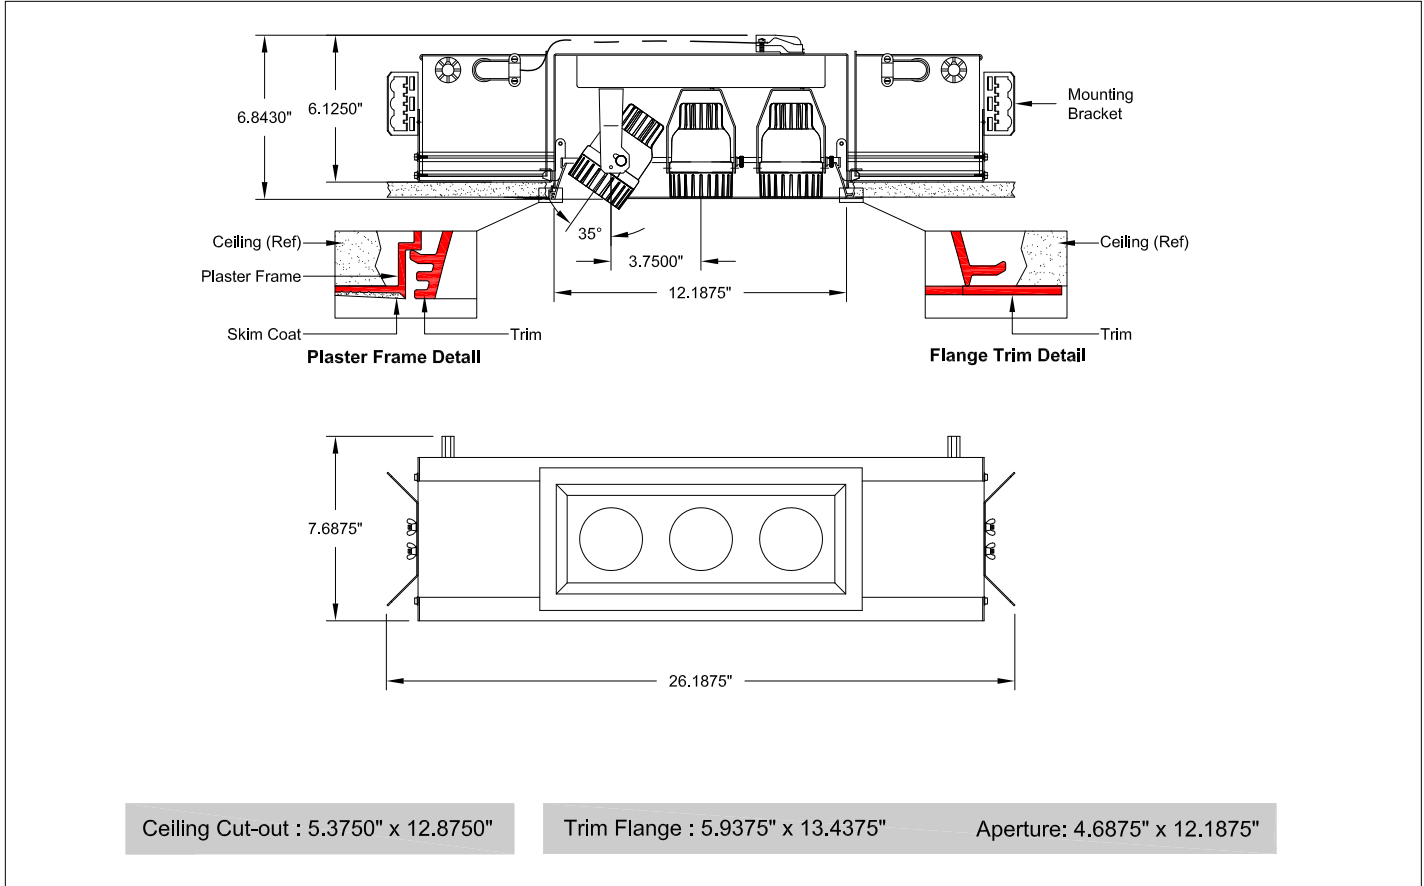


## Accentlight, Open Aperture Adjustable Lampholder



**-3-M6M - /B-AD-**

Trim Type	Wattage	Trim Finish	Voltage
<input type="checkbox"/> VAP Plaster	<input type="checkbox"/> 20	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange	<input type="checkbox"/> 39	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)

### Description

Recessed open aperture metal halide accent fixture. Adjustable lampholders. Three MR16 MH lamps. Flanged or plaster frame trim.

### Features

- Below ceiling access to the ballast and wiring.
- Lampholders are adjustable from 0°-35°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

### Fixture Specifications

Dimensions: 26.187"L x 7.687"W x 6.125"H  
 Weight: Approx. 16 lbs.  
 Ceiling Cutout: 12.875"L x 5.375"W

### Electrical

- Power Consumption: 117 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast.
- Through branch wiring capable.

### Mounting

Universal mounting brackets included.  
 Contact factory for special ceiling conditions.

### Options (Consult factory)

- Lenses: Page 3


Photometry: Page 2



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

# VersaLux™ Series VA
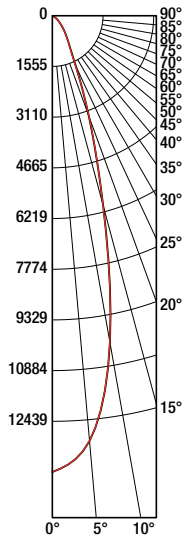
## Accentlight, Open Aperture Adjustable Lampholder




— 0° Plane — 90° Plane

### 3 Lamp Photometrics
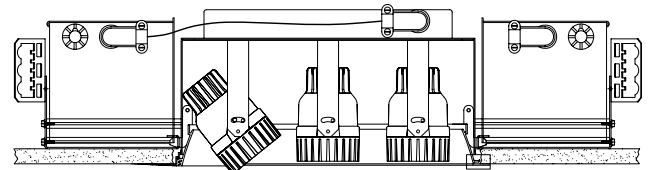
#### 39 Watt MR16 Metal Halide, 25° Flood

Clear Lens

Photometry reports for other fixture configurations, consult factory



Total Luminaire Efficiency: 73.00%

#### Candela Distribution

	0	15	30	45	60	75	90
0	13994	13994	13994	13994	13994	13994	13994
5	13091	13091	13069	13090	13057	13094	13088
10	10174	10172	10205	10178	10161	10187	10158
15	6016	6028	6035	6039	6067	6035	6001
20	3267	3272	3257	3291	3287	3290	3305
25	1696	1688	1689	1681	1673	1672	1649
30	1043	1052	1053	1053	1048	1043	1036
35	736	735	730	735	727	732	729
40	524	524	522	524	523	521	522
45	356	356	358	358	359	355	361
50	240	237	237	239	238	240	236
55	145	146	144	144	146	144	144
60	73	74	72	73	74	72	72
65	27	27	27	27	27	26	26
70	7	7	7	7	7	7	8
75	3	3	3	3	3	3	3
80	1	1	1	1	1	1	1
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

#### Zonal Lumen Summary

5	625
10	969
15	856
20	615
25	389
30	287
35	230
40	184
45	139
50	100
55	65
60	35
65	13
70	4
75	2
80	0
85	0
90	0

#### Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	88	88	88	88	86	86	86	86	82	82	82	78	78	78	75	75	75	74
1	84	82	81	79	82	81	79	78	78	77	75	75	74	73	71	71	71	70
2	81	77	75	73	79	76	74	72	74	72	70	72	70	69	67	67	67	66
3	77	73	70	67	76	72	69	67	70	68	66	68	66	65	63	63	63	63
4	74	69	66	63	73	69	65	63	67	64	62	66	63	61	60	60	60	60
5	71	66	62	60	70	65	62	59	64	61	59	63	60	58	57	57	57	57
6	68	63	59	57	67	62	59	56	61	58	56	60	58	56	54	54	54	54
7	66	60	56	54	65	60	56	54	59	56	53	58	55	53	52	52	52	52
8	64	58	54	52	63	57	54	51	57	54	51	56	53	51	50	50	50	50
9	61	56	52	49	61	55	52	49	55	51	49	54	51	49	48	48	48	48
10	59	54	50	48	59	53	50	48	53	50	47	52	49	47	46	46	46	4

VA-3-M6M

Job Name:

Fixture Type:

**Lens Options**

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.