


Accentlight, Open Aperture Extendable Lampholder



MR16

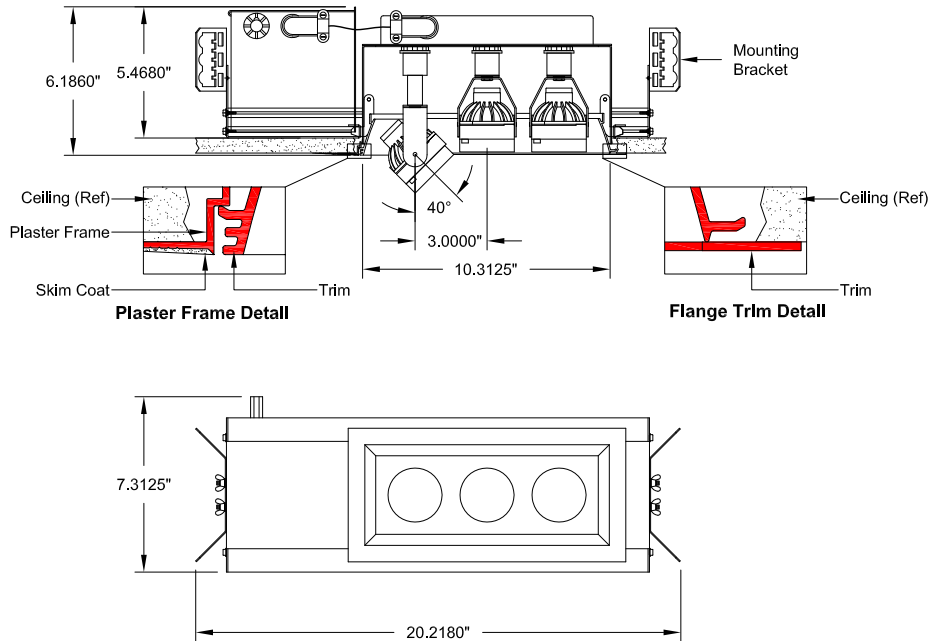

Ceiling Cut-out : 5.0000" x 11.0000"

Trim Flange : 5.5625" x 11.5625"

Aperture: 4.3125" x 10.3125"

-3-M6 - /B-EX-

Trim Type	Wattage	Trim Finish	Voltage
<input type="checkbox"/> VAP Plaster	<input type="checkbox"/> 20	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange	<input type="checkbox"/> 37	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)
	<input type="checkbox"/> 50		

Description

Recessed Open aperture accent fixture. Adjustable and extendable lampholders. Extends 1.25" below aperture. Three MR16 lamps. Flanged or plaster frame trim.

Features

- Standard Lens: Clear
- Below ceiling access to the transformer and wiring.
- Lampholders are adjustable from 0°-40°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: 20.218"L x 7.312"W x 5.468"H
Weight: Approx. 14 lbs.
Ceiling Cutout: 11"L x 5"W

Electrical

- Power Consumption: 150 watts max.
- Ambient temperature 100 °F. maximum.
- Integral toroidal transformer.
- Through branch wiring capable.

Mounting

Universal mounting brackets included.
Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3


Photometry: Page 2



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

Accentlight, Open Aperture Extendable Lampholder

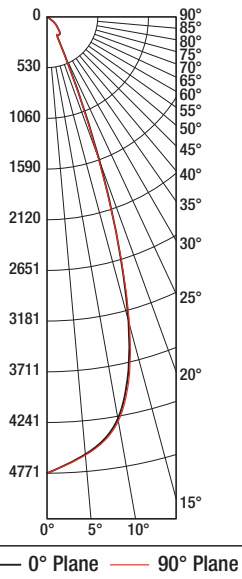


3 Lamp Photometrics

50 Watt MR16, 38° Flood

Clear Lens

Lampholder Position: Retracted

Photometry reports for other fixture configurations, consult factory

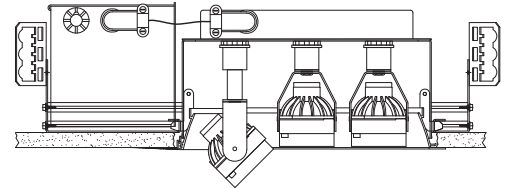

Total Luminaire Efficiency: 77.70%

Candela Distribution

	0	15	30	45	60	75	90
0	4771	4771	4771	4771	4771	4771	4771
5	4590	4569	4583	4573	4608	4595	4599
10	4263	4262	4254	4266	4270	4269	4290
15	3290	3301	3312	3323	3331	3337	3335
20	1591	1589	1581	1581	1568	1570	1560
25	420	417	415	404	399	387	382
30	216	221	219	217	216	214	213
35	226	226	224	226	224	225	226
40	207	208	208	207	208	208	207
45	152	149	151	151	151	150	150
50	116	116	116	117	117	117	116
55	60	60	61	61	60	59	60
60	17	17	18	18	18	18	18
65	7	6	7	7	7	7	7
70	2	2	2	2	2	2	2
75	1	1	1	1	1	1	1
80	0	0	0	0	0	0	0
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

5	219
10	406
15	471
20	296
25	94
30	59
35	71
40	73
45	58
50	49
55	27
60	8
65	3
70	1
75	0
80	0
85	0
90	0

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	94	94	94	94	91	91	91	91	87	87	87	84	84	84	80	80	80	79
1	90	88	86	85	88	86	85	83	83	82	81	80	79	78	76	76	76	75
2	86	83	80	78	85	82	79	77	79	77	75	77	75	74	72	72	72	71
3	83	78	75	73	81	77	74	72	75	73	71	74	71	70	68	68	68	68
4	80	75	71	68	78	74	70	68	72	69	67	71	68	66	65	65	65	64
5	76	71	67	64	75	70	67	64	69	66	64	68	65	63	62	62	62	62
6	74	68	64	61	73	67	64	61	66	63	61	65	62	60	59	59	59	59
7	71	65	61	58	70	65	61	58	64	60	58	63	60	58	57	57	57	57
8	69	63	59	56	68	62	58	56	61	58	56	61	58	56	54	54	54	54
9	66	60	56	54	66	60	56	54	59	56	54	59	56	53	52	52	52	52
10	64	58	54	52	64	58	54	52	57	54	52	57	54	52	51	51	51	5

VA-3-M6

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.