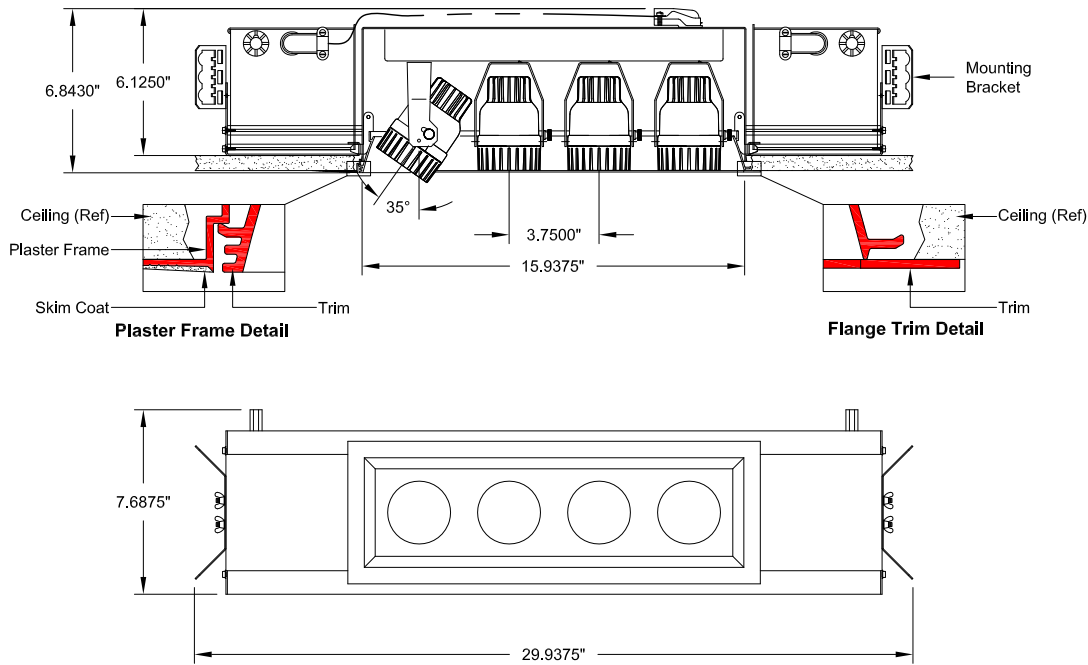


Accentlight, Open Aperture Adjustable Lampholder



MR16 MH



Ceiling Cut-out : 5.3750" x 16.6250"

Trim Flange : 5.9375" x 17.1875"

Aperture: 4.6875" x 15.9375"

-4-M6M - /B-AD-

Trim Type	Wattage	Trim Finish	Voltage
<input type="checkbox"/> VAP Plaster	<input type="checkbox"/> 20	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange	<input type="checkbox"/> 39	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)

Description

Recessed open aperture metal halide accent fixture. Adjustable lampholders. Four MR16 MH lamps. Flanged or plaster frame trim.

Features

- Below ceiling access to the ballast and wiring.
- Lampholders are adjustable from 0°-35°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: 29.937"L x 7.687"W x 6.125"H
 Weight: Approx. 18 lbs.
 Ceiling Cutout: 16.625"L x 5.375"W

Electrical

- Power consumption: 156 watts maximum.
- Integral electronic ballast.
- Through branch wiring capable.

Mounting

Universal mounting brackets included.
 Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3


Photometry: Page 2



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

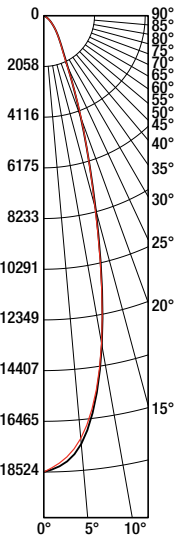Accentlight, Open Aperture Adjustable Lampholder




— 0° Plane — 90° Plane

4 Lamp Photometrics

39 Watt MR16 Metal Halide, 25° Flood

Clear Lens

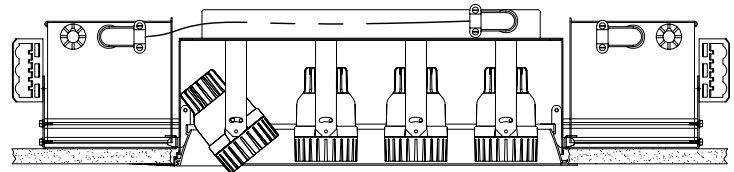Photometry reports for other fixture configurations, consult factory



Total Luminaire Efficiency: 74.20%

Candela Distribution

	0	15	30	45	60	75	90
0	18524	18524	18524	18524	18524	18524	18524
5	17451	17296	17421	17303	17363	17368	17225
10	13564	13581	13560	13546	13509	13545	13498
15	8137	8064	8089	8101	8052	8070	8027
20	4378	4403	4392	4375	4382	4424	4442
25	2307	2324	2291	2298	2276	2265	2242
30	1446	1444	1436	1423	1430	1425	1418
35	1021	1016	1012	1014	1017	1007	1005
40	731	743	739	724	730	725	734
45	507	513	516	511	509	511	509
50	349	354	350	354	351	350	344
55	226	226	220	224	226	226	221
60	126	122	117	120	120	122	123
65	52	49	51	51	48	48	49
70	12	13	13	13	13	13	13
75	4	4	4	4	4	4	4
80	1	1	1	1	1	1	1
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

5	829
10	1289
15	1146
20	824
25	530
30	392
35	319
40	258
45	198
50	147
55	101
60	57
65	25
70	7
75	2
80	1
85	0
90	0

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	89	89	89	89	87	87	87	87	83	83	83	80	80	80	76	76	76	75
1	86	84	82	80	84	82	81	79	79	78	77	76	75	74	72	72	72	71
2	82	79	76	74	80	77	75	73	75	73	71	73	71	70	68	68	68	67
3	78	74	71	68	77	73	70	68	71	69	67	69	67	66	64	64	64	64
4	75	70	67	64	74	69	66	63	68	65	63	66	64	62	61	61	61	60
5	72	67	63	60	71	66	63	60	65	62	59	64	61	59	58	58	58	57
6	69	64	60	57	68	63	59	57	62	59	56	61	58	56	55	55	55	55
7	67	61	57	54	66	60	57	54	59	56	54	59	56	54	53	53	53	52
8	64	58	55	52	64	58	54	52	57	54	52	56	54	51	50	50	50	50
9	62	56	52	50	61	56	52	50	55	52	50	54	52	49	48	48	48	48
10	60	54	50	48	59	54	50	48	53	50	48	53	50	48	47	47	47	4

VA-4-M6M

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.