


Accentlight, Open Aperture Extendable Lampholder



MR16

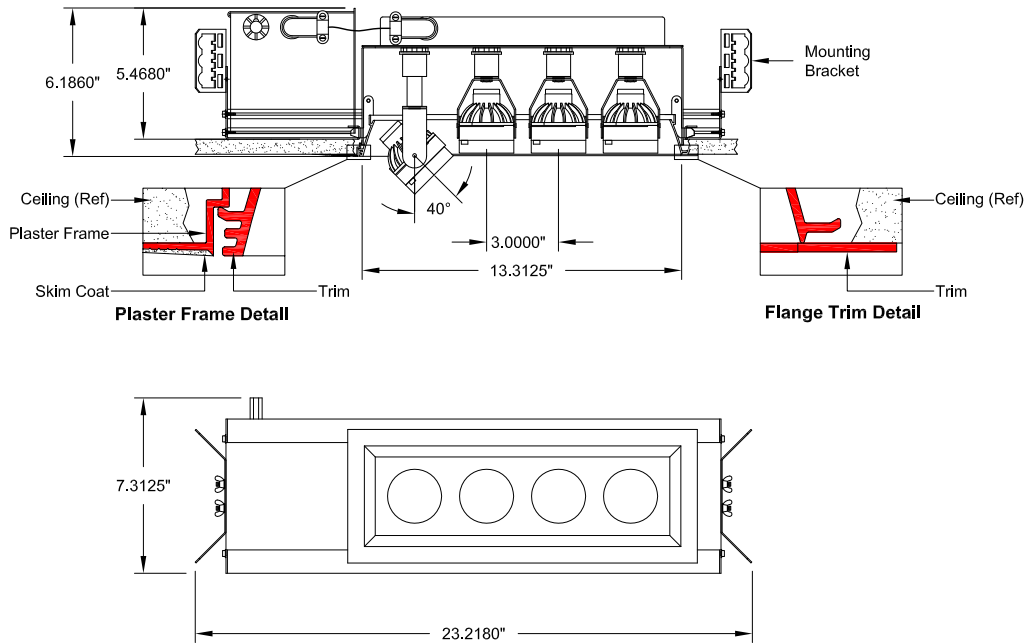

Ceiling Cut-out : 5.0000" x 14.0000"

Trim Flange : 5.5625" x 14.5625"

Aperture: 4.3125" x 13.3125"

-4-M6		-	/B-EX-	
Trim Type	Wattage	Trim Finish	Voltage	
<input type="checkbox"/> VAP Plaster <input type="checkbox"/> VAF Flange	<input type="checkbox"/> 20 <input type="checkbox"/> 37 <input type="checkbox"/> 50	<input type="checkbox"/> W White <input type="checkbox"/> B Black	<input type="checkbox"/> 1 (120V) <input type="checkbox"/> 2 (277V)	

Description

Recessed open aperture accent fixture. Adjustable and extendable lampholders. Extends 1.25" below aperture. Four MR16 lamps. Flanged or plaster frame trim.

Features

- Standard Lens: Clear
- Below ceiling access to the transformer and wiring.
- Lampholders are adjustable from 0°-40°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: 23.218"L x 7.312"W x 5.468"H
 Weight: Approx. 16 lbs.
 Ceiling Cutout: 14"L x 5"W

Electrical

- Power Consumption: 200 watts max.
- Ambient temperature 100 °F. maximum.
- Integral toroidal transformer.
- Through branch wiring capable.

Mounting

Universal mounting brackets included.
 Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3


Photometry: Page 2



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

Accentlight, Open Aperture Extendable Lampholder

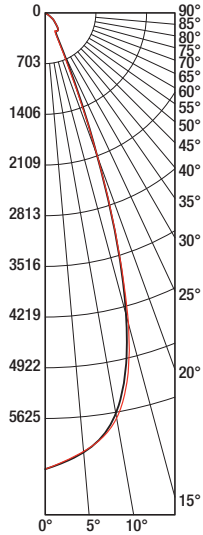

— 0° Plane — 90° Plane


4 Lamp Photometrics

50 Watt MR16, 38° Flood

Clear Lens

Lampholder Position: Retracted

Photometry reports for other fixture configurations, consult factory

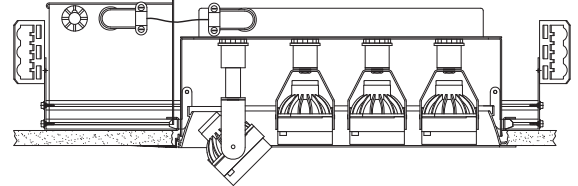

Total Luminaire Efficiency: 77.30%

Candela Distribution

	0	15	30	45	60	75	90
0	6328	6328	6328	6328	6328	6328	6328
5	6117	6082	6100	6089	6096	6125	6105
10	5641	5625	5651	5649	5672	5682	5703
15	4336	4368	4362	4409	4413	4418	4463
20	2124	2115	2105	2111	2099	2085	2090
25	583	580	574	560	541	526	505
30	296	296	295	290	290	280	289
35	301	299	298	296	296	297	302
40	270	273	271	277	273	271	273
45	197	199	199	199	196	197	199
50	150	151	151	151	149	153	152
55	78	78	79	78	77	78	76
60	22	23	23	23	22	23	21
65	9	8	8	8	8	8	8
70	2	2	2	2	2	2	3
75	1	1	1	1	1	1	1
80	0	0	0	0	0	0	0
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

5	291
10	539
15	624
20	394
25	128
30	80
35	94
40	96
45	77
50	63
55	35
60	11
65	4
70	1
75	0
80	0
85	0
90	0

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	93	93	93	93	91	91	91	91	87	87	87	83	83	83	80	80	80	78
1	89	88	86	84	88	86	84	83	83	82	80	80	79	78	76	76	76	75
2	86	83	80	78	84	81	79	77	79	77	75	77	75	74	71	71	71	71
3	82	78	75	72	81	77	74	72	75	73	71	73	71	69	68	68	68	67
4	79	74	71	68	78	73	70	67	72	69	67	70	68	66	64	64	64	64
5	76	71	67	64	75	70	67	64	69	66	63	68	65	63	62	62	62	61
6	73	68	64	61	72	67	63	61	66	63	60	65	62	60	59	59	59	59
7	71	65	61	58	70	64	61	58	63	60	58	63	60	58	56	56	56	56
8	68	62	59	56	68	62	58	56	61	58	56	60	57	55	54	54	54	54
9	66	60	56	54	65	60	56	54	59	56	53	58	55	53	52	52	52	52
10	64	58	54	52	63	58	54	52	57	54	52	56	54	51	51	51	51	5

VA-4-M6

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.