


## Downlight, Involute Trim with Splay Aperture and Regressed Lens



**-1-CF**

**-W/W-**

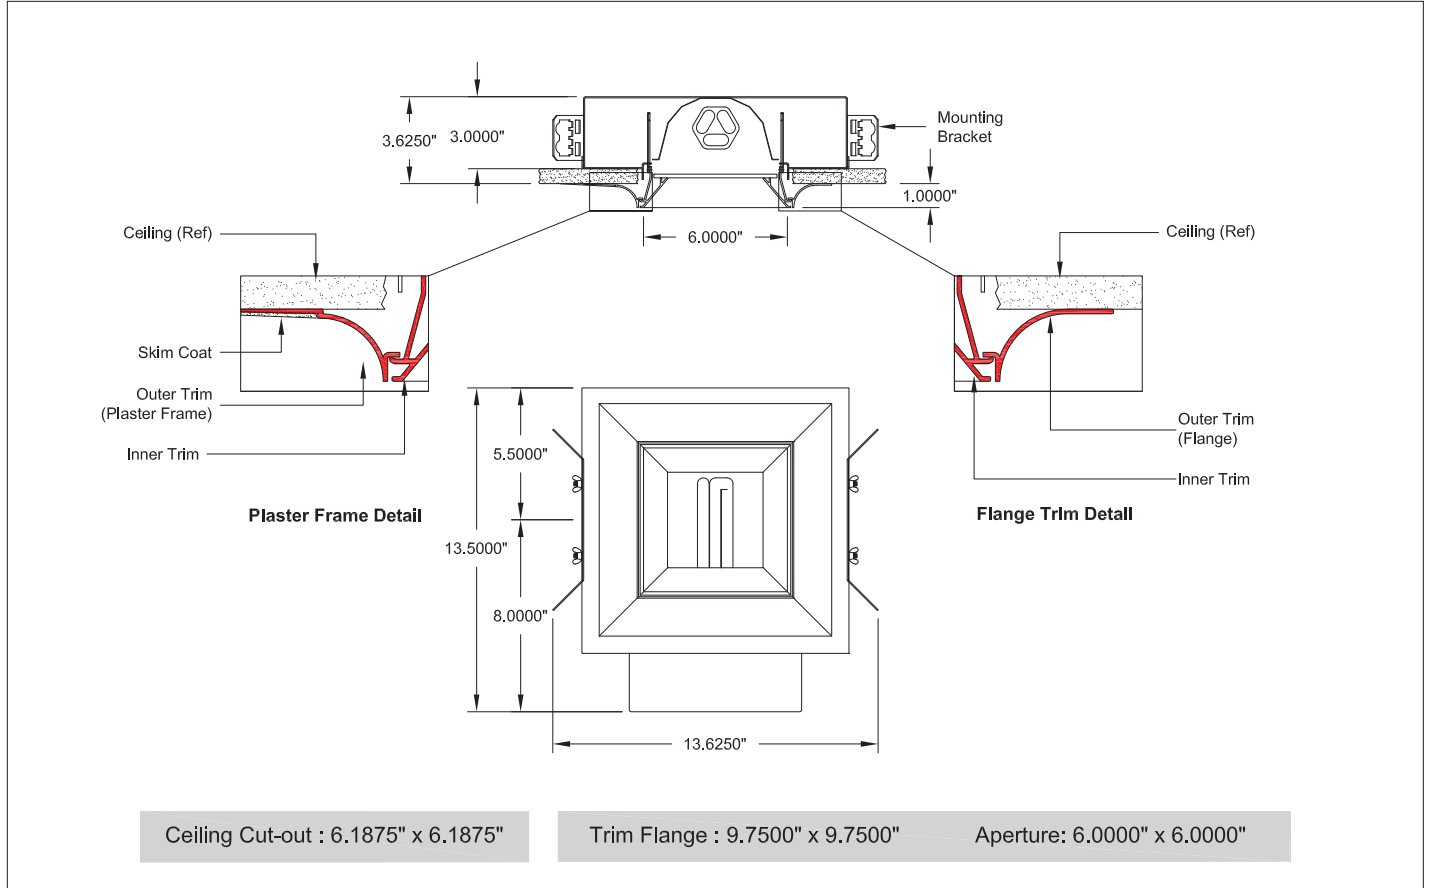

Trim Type	Wattage	Lamp Type	Voltage
<input type="checkbox"/> VSIP Plaster	<input type="checkbox"/> 26	<input type="checkbox"/> Q Quad (26W only)	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VSIF Flange	<input type="checkbox"/> 32	<input type="checkbox"/> T Triple	<input type="checkbox"/> 2 (277V)
	<input type="checkbox"/> 42		

### Description

Recessed compact fluorescent downlight fixture with exclusive "INVOLUTE" trim and splay aperture with regressed lens. One compact fluorescent lamp. Flanged or plaster frame trim.

### Features

- Standard Lens: Solite
- Below ceiling access to the ballast and wiring.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

### Fixture Specifications

Dimensions: 13.5000"L x 13.625"W x 3"H  
 Weight: Approx. 8 lbs.  
 Ceiling Cutout: 6.187"L x 6.187"W

### Electrical

- Power consumption: 42 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast.
- Through branch wiring capabl.

### Mounting

Universal mounting brackets included.  
 Contact factory for special ceiling conditions.

### Options (Consult factory)

- Lenses: Page 2
- EM Pack

### Photometry: Page 3








All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VSI-1-CF

Job Name:

Fixture Type:


**Lens Options**

	Lenses		Cat. No.
<input type="checkbox"/>		Solite Spread Lens	S0
<input type="checkbox"/>		Frosted Solite Spread Lens	FS
<input type="checkbox"/>		Prismatic Spread Lens	PR
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FP
<input type="checkbox"/>		2067-P95 Frosted Acrylic Lens	67P

For other lens options, consult factory.

# VersaLux™ Series VSI

Downlight, Involute Trim with Splay Aperture and Regressed Lens

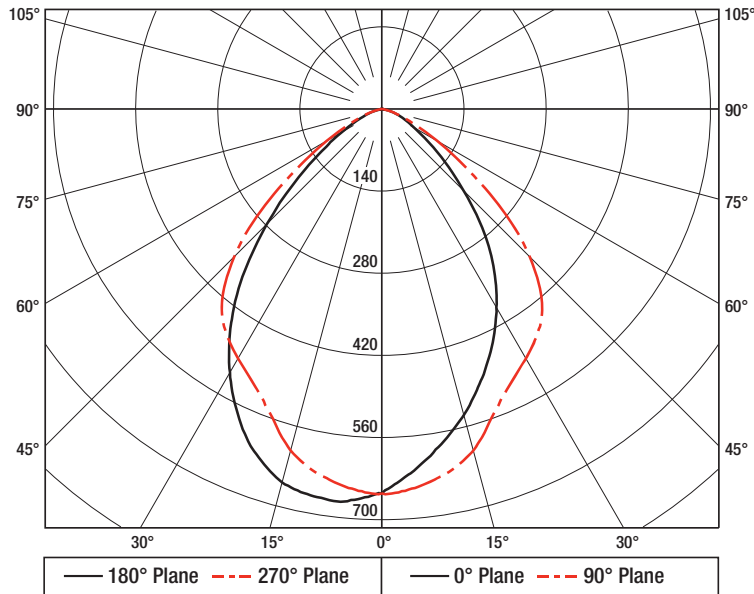


## Fixture Photometrics

32 Watt, Triple Tube

Solite Lens

Photometry reports for other fixture configurations, consult factory



Total Luminaire Efficiency: 49.50%

### Candela Distribution

	0	22.5	45	67.5	90	112.5	135	157.5	180	Flux
0	655	655	655	655	655	655	655	655	655	0
5	620	621	629	637	648	658	665	670	671	61
15	540	540	554	576	603	628	645	655	659	168
25	445	442	449	475	518	545	568	580	579	236
35	333	333	353	403	464	492	486	465	450	265
45	198	229	266	301	357	395	395	327	278	240
55	95	119	131	148	177	204	201	170	125	143
65	44	47	44	57	60	71	59	60	46	57
75	16	14	14	15	14	15	14	14	9	15
85	3	2	2	2	2	2	2	1	1	2
90										

### Zonal Lumen Summary

0-5	16
5-10	46
10-15	73
15-20	95
20-25	112
25-30	124
30-35	131
35-40	134
40-45	129
45-50	112
50-55	85
55-60	58
60-65	36
65-70	21
70-75	12
75-80	4
80-85	2
85-90	

### Utilization

RC	80				70				50			30			10			Flux
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	59	59	59	59	58	58	58	58	55	55	55	53	53	53	50	50	50	49
1	55	54	52	51	54	53	51	50	51	49	48	49	48	47	47	46	46	45
2	52	49	46	44	51	48	46	44	46	44	43	45	43	42	43	42	41	40
3	48	44	41	39	47	44	41	38	42	40	38	41	39	37	40	38	37	36
4	45	40	37	34	44	40	36	34	38	36	33	37	35	33	36	34	33	32
5	42	36	33	30	41	36	32	30	35	32	30	34	31	29	33	31	29	28
6	39	33	29	27	38	33	29	27	32	29	26	31	28	26	30	28	26	25
7	36	30	26	24	35	30	26	24	29	26	23	28	25	23	28	25	23	22
8	33	27	23	21	32	27	23	21	26	23	21	26	23	21	25	22	20	20
9	31	25	21	18	30	24	21	18	24	20	18	23	20	18	23	20	18	17
10	28	22	19	16	28	22	19	16	22	18	16	21	18	16	21	18	16	15