


## Wallwash, Involute Trim

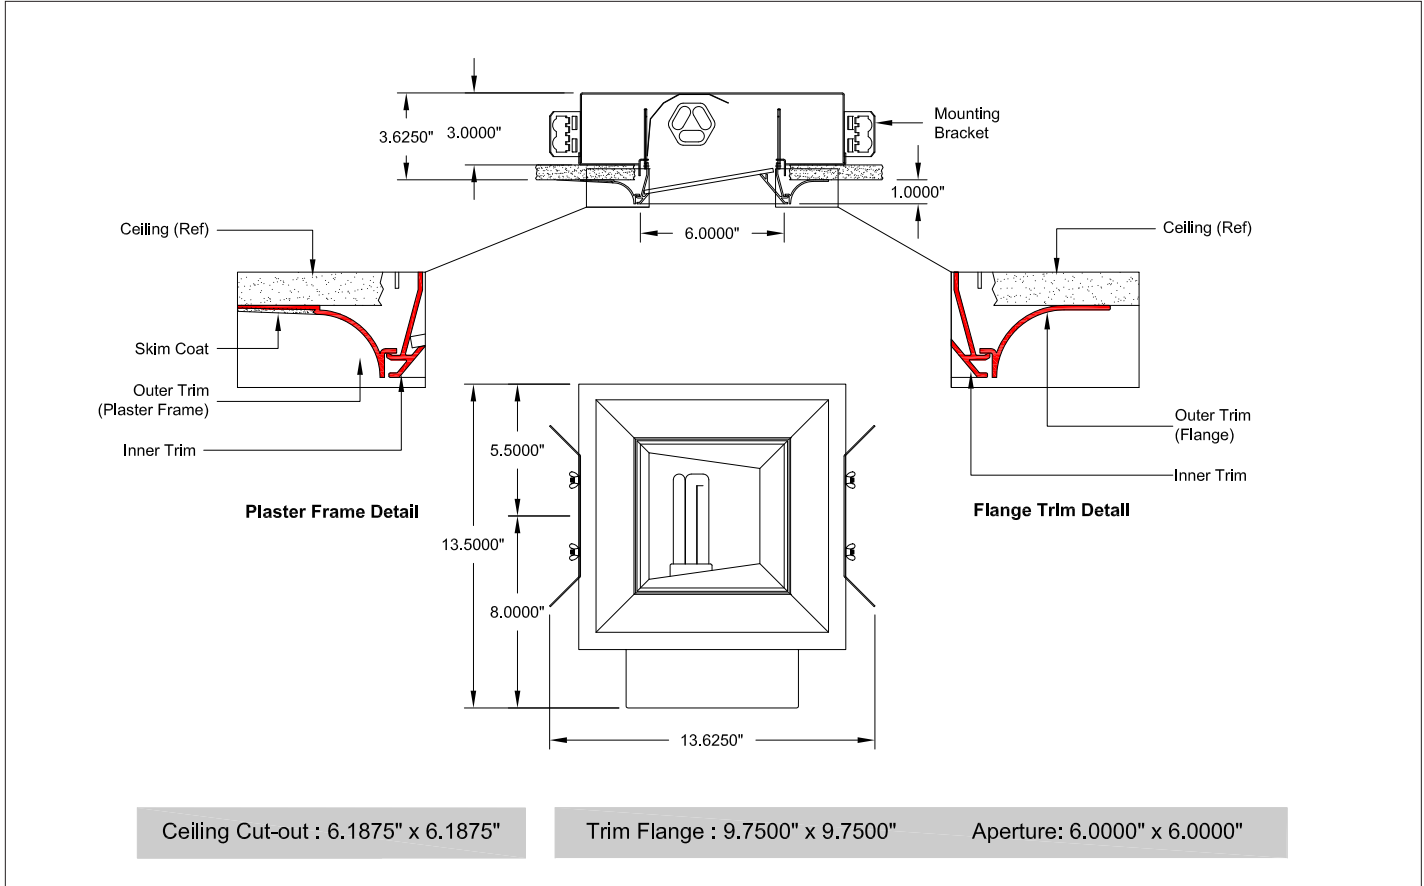

-1-CF -W/W-

Trim Type	Wattage	Lamp Type	Voltage
<input type="checkbox"/> VWIP Plaster	<input type="checkbox"/> 26	<input type="checkbox"/> Q Quad (26W only)	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VWIF Flange	<input type="checkbox"/> 32	<input type="checkbox"/> T Triple	<input type="checkbox"/> 2 (277V)
	<input type="checkbox"/> 42		

### Description

Recessed compact fluorescent wallwash fixture with lens and exclusive "INVOLUTE" trim. One compact fluorescent lamp. Flanged or plaster frame trim.

### Features

- Standard Lens: Skytex
- Below ceiling access to the ballast and wiring.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

### Fixture Specifications

Dimensions: 13.5"L x 13.625"W x 3"H  
 Weight: Approx. 8 lbs.  
 Ceiling Cutout: 6.187"L x 6.187"W

### Electrical

- Power Consumption: 42 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast.
- Through branch wiring capable.

### Mounting

Universal mounting brackets included.  
 Contact factory for special ceiling conditions

### Options (Consult factory)

- Lenses: Page 2
- EM Pack

### Photometry: Page 3










All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VWI-1-CF

Job Name:

Fixture Type:


**Lens Options**

	Lenses		Cat. No.
<input type="checkbox"/>		Solite Spread Lens	SO
<input type="checkbox"/>		Frosted Solite Spread Lens	FS
<input type="checkbox"/>		Prismatic Spread Lens	PR
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FP
<input type="checkbox"/>		Skytex Linear Spread Lens	SK
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FK
<input type="checkbox"/>		2067-P95 Frosted Acrylic Lens	67P

For other lens options, consult factory.

# VersaLux™ Series VWI

## Wallwash, Involute Trim

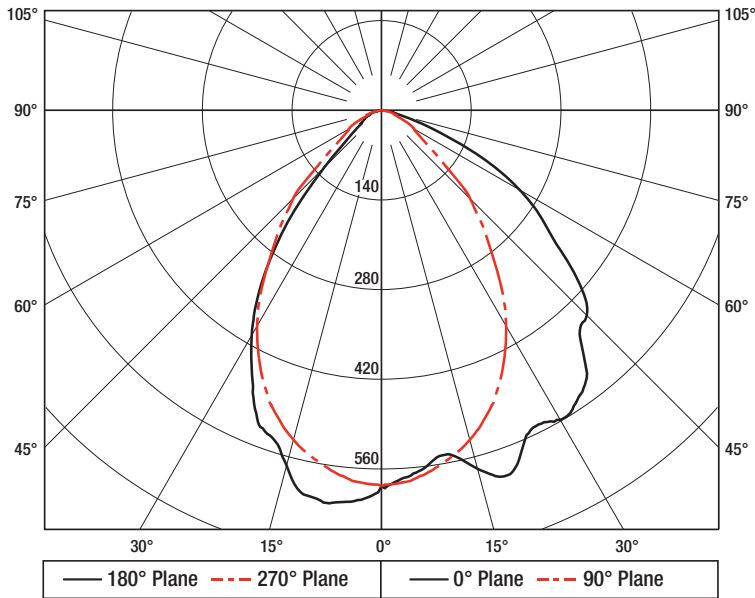


## Fixture Photometrics

32 Watt, Triple Tube

Skytex Lens

Photometry reports for other fixture configurations, consult factory



Total Luminaire Efficiency: 45.20%

### Candela Distribution

	0	22.5	45	67.5	90	112.5	135	157.5	180	Flux
0	588	588	588	588	588	588	588	588	588	0
5	569	567	569	572	578	589	600	607	614	55
15	579	565	532	527	533	560	577	579	574	157
25	551	550	543	464	447	471	469	477	476	226
35	541	521	448	388	320	330	321	322	325	240
45	453	426	358	257	196	199	175	148	129	196
55	313	281	204	117	76	75	83	51	43	121
65	168	120	84	51	43	43	33	26	28	63
75	33	42	22	18	18	18	12	12	12	22
85	1	4	3	1			1	2	3	3
90										

### Zonal Lumen Summary

0-5	14
5-10	41
10-15	67
15-20	90
20-25	108
25-30	118
30-35	122
35-40	118
40-45	106
45-50	91
50-55	70
55-60	51
60-65	38
65-70	25
70-75	15
75-80	8
80-85	3
85-90	

### Utilization

RC	80				70				50			30			10			Flux
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	54	54	54	54	52	52	52	52	50	50	50	48	48	48	46	46	46	45
1	50	49	47	46	49	48	47	45	46	45	44	44	43	43	43	42	41	41
2	47	44	42	40	46	44	41	40	42	40	39	41	39	38	39	38	37	36
3	44	40	37	35	43	40	37	35	38	36	34	37	35	34	36	35	33	32
4	41	37	33	31	40	36	33	31	35	32	30	34	32	30	33	31	30	29
5	38	33	30	27	37	33	29	27	32	29	27	31	28	27	30	28	26	25
6	35	30	27	24	34	30	27	24	29	26	24	28	26	24	28	25	24	23
7	33	27	24	22	32	27	24	22	26	24	21	26	23	21	25	23	21	20
8	30	25	21	19	30	25	21	19	24	21	19	24	21	19	23	21	19	18
9	28	23	19	17	27	22	19	17	22	19	17	21	19	17	21	18	17	16
10	26	21	17	15	26	20	17	15	20	17	15	20	17	15	19	17	15	14