


Accentlight, Open Aperture

T4 MH

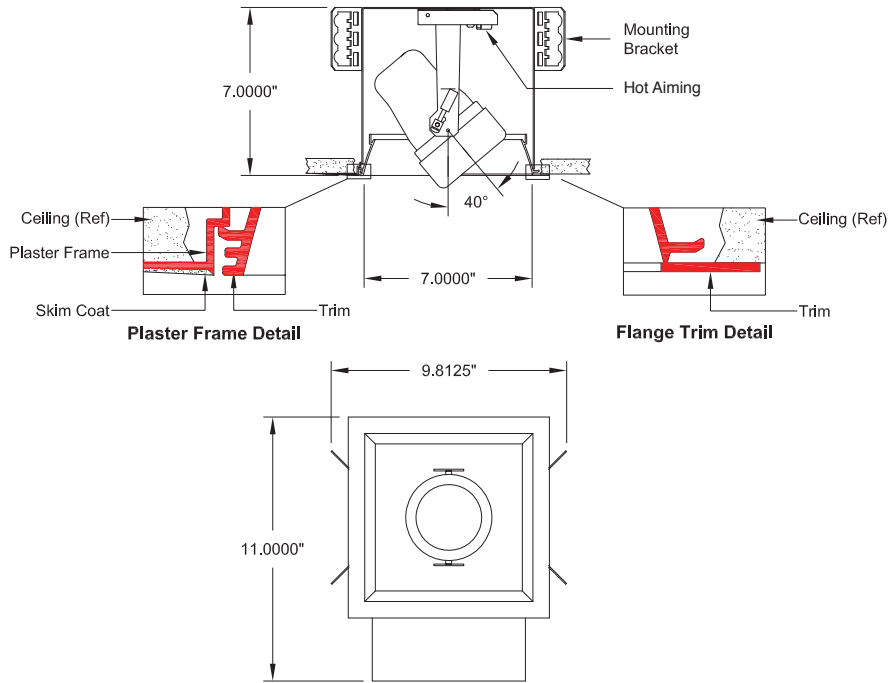

Ceiling Cut-out : 7.6250" x 7.6250"

Trim Flange : 8.3750" x 8.3750"

Aperture: 7.0000" x 7.0000"

Trim Type	Wattage	Trim Finish	Beam Spread (°)	Voltage
<input type="checkbox"/> VAP Plaster	<input type="checkbox"/> 22	<input type="checkbox"/> W White	<input type="checkbox"/> 15	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VAF Flange	<input type="checkbox"/> 39	<input type="checkbox"/> B Black	<input type="checkbox"/> 24	<input type="checkbox"/> 2 (277V)
	<input type="checkbox"/> 70		<input type="checkbox"/> 40	

Description

Recessed open aperture metal halide accent fixture. Adjustable lampholder. One T4 MH lamp. Flanged or plaster frame trim.

Features

- Standard Lens: Clear
- Below ceiling access to the ballast and wiring.
- Lampholder is adjustable from 0°-40°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Hot Aiming permits lamp adjustment while lit.

Fixture Specifications

Dimensions: 9.812"L x 11"W x 7"H
 Weight: Approx. 6 lbs.
 Ceiling Cutout: 7.625"L x 7.625"W

Electrical

- Power Consumption: 78 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast, thermally protected
- Through branch wiring capable.

Mounting

Universal mounting brackets included.
 Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 3

Photometry: Page 2




All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

Accentlight, Open Aperture

T4 MH

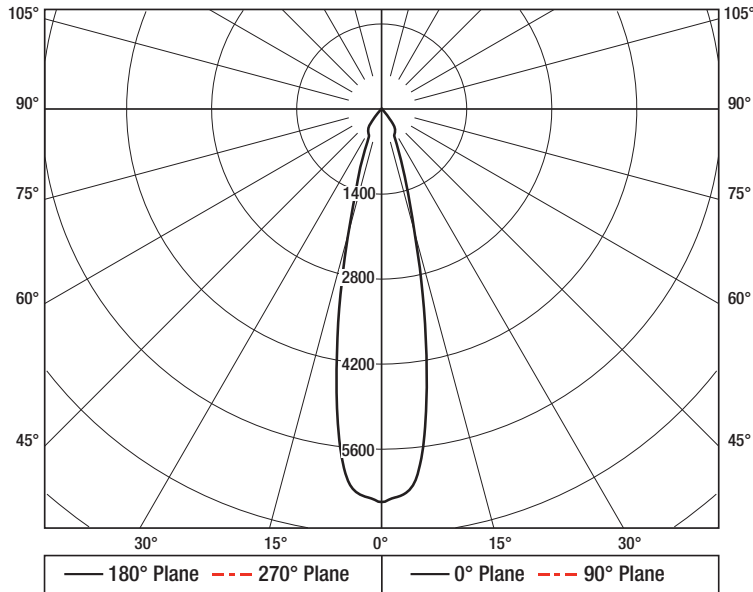


1 Lamp Photometrics

39 Watt T4 Metal Halide

Clear Lens

Photometry reports for other fixture configurations, consult factory



Total Luminaire Efficiency: 49.10%

Candela Distribution

	0	22.5	45	67.5	90
0	6471	6471	6471	6471	6471
5	6174	6174	6174	6174	6174
10	4268	4268	4268	4268	4268
15	2111	2111	2111	2111	2111
20	1026	1026	1026	1026	1026
25	495	495	495	495	495
30	439	439	439	439	439
35	378	378	378	378	378
40	178	178	178	178	178
45	58	58	58	58	58
50	16	16	16	16	16
55	4	4	4	4	4
60	0	0	0	0	0
65	0	0	0	0	0
70	0	0	0	0	0
75	0	0	0	0	0
80	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

Zonal Lumen Summary

5	151
10	375
15	365
20	237
25	147
30	117
35	121
40	95
45	40
50	14
55	3.5
60	0.6
65	0
70	0
75	0
80	0
85	0
90	0

Utilization


















RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	58	58	58	58	57	57	57	57	55	55	55	52	52	52	50	50	50	49
1	56	55	54	53	55	54	53	52	52	51	51	50	50	49	49	48	48	47
2	54	52	51	49	53	51	50	49	50	49	48	48	48	47	47	46	46	45
3	52	50	48	46	51	49	47	46	48	46	45	47	45	44	46	45	44	43
4	50	47	45	44	49	47	45	43	46	44	43	45	43	42	44	43	42	41
5	48	45	43	41	48	45	43	41	44	42	41	43	42	40	43	41	40	40
6	47	43	41	39	46	43	41	39	42	40	39	42	40	39	41	40	39	38
7	45	42	39	38	45	41	39	38	41	39	38	40	39	37	40	38	37	37
8	44	40	38	36	43	40	38	36	39	37	36	39	37	36	39	37	36	35
9	42	39	36	35	42	39	36	35	38	36	35	38	36	35	37	36	35	34
10	41	37	35	34	41	37	35	34	37	35	34	37	35	34	36	35	33	33

VA-1-4TM

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNT4
<input type="checkbox"/>		Cross Blade Baffle	XBT4
<input type="checkbox"/>		Hexagonal Louver	HXT4
<input type="checkbox"/>		Solite Spread Lens	SOT4
<input type="checkbox"/>		Frosted Solite Spread Lens	FST4
<input type="checkbox"/>		Prismatic Spread Lens	PRT4
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPT4
<input type="checkbox"/>		Skytex Linear Spread Lens	SKT4
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKT4
<input type="checkbox"/>		Flash Opal Lens	FOT4
<input type="checkbox"/>		Optivex UV Lens	UVT4
<input type="checkbox"/>		Frosted Clear Lens	FCT4
<input type="checkbox"/>		Red Filter Lens	RLT4
<input type="checkbox"/>		Green Filter Lens	GLT4
<input type="checkbox"/>		Blue Filter Lens	BLT4
<input type="checkbox"/>		Amber Filter Lens	ALT4
<input type="checkbox"/>		Dichroic Filter Lens	DLT4

For other accessory/lens options, consult factory.