


**Fluorescent Slot, Regressed Lens with MR16 LED Pinhole Aperture**

**T5**

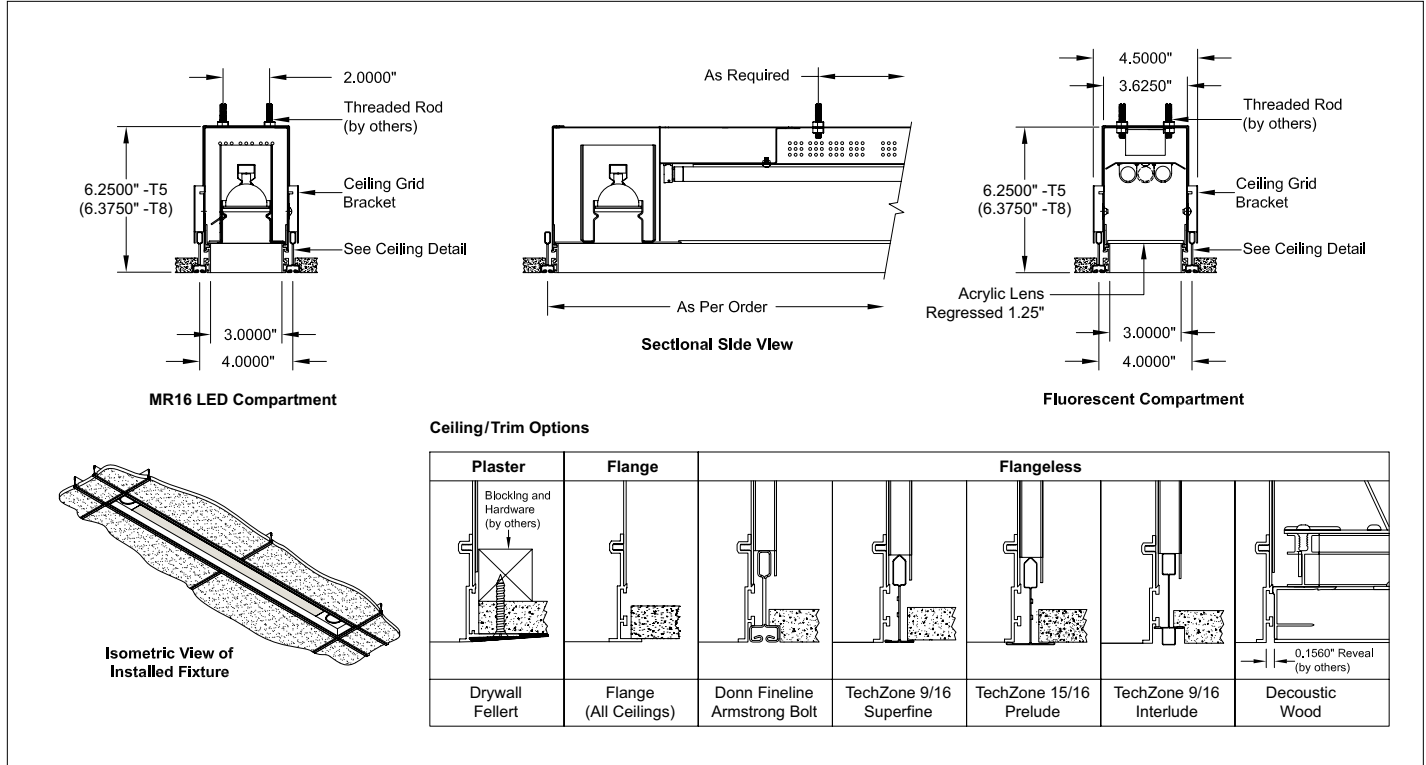

VRR4- L6 - T - -W-

# of MR16 Lamps    LED Wattage    # of Fluor Lamps in Cross Section    Fluor Lamp Wattage    Ballast    Length    Trim Options\*    Voltage

# of MR16	LED Wattage	# of Fluor in Cross Section	Fluor Wattage	Ballast (Specify below)	Length	Trim Options*	Voltage
<input type="checkbox"/> 1	Consult factory for Lamp to Transformer/Driver compatibility	<input type="checkbox"/> 1	See Configurations (Pages 2-3)	<input type="checkbox"/> E (Electronic) Std.	<input type="checkbox"/> 36" <input type="checkbox"/> 72"	<input type="checkbox"/> P (Plaster)	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> 2		<input type="checkbox"/> 2		<input type="checkbox"/> D (Dimming) †	<input type="checkbox"/> 48" <input type="checkbox"/> 84"	<input type="checkbox"/> F (Flange)	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> 3					<input type="checkbox"/> 60" <input type="checkbox"/> 96"	<input type="checkbox"/> X (Flangeless)	
				† Specify Ballast (required)	<input type="checkbox"/> Custom (specify)		

\* P=Plaster: For use with Drywall and Fellert.  
 F=Flange: Suitable for all ceiling types.  
 X=Flangeless: For use with Donn Finline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

**Description**  
 Fluorescent slot with regressed lens and MR16 LED pinhole aperture.

**Features**

- Standard Lens: Frosted acrylic
- Shiplapped lenses for sections longer than 96"
- Fixtures fabricated to any length (Refer to Pages 2-3)
- Continuous run length configurations with fully illuminated corners
- Below ceiling access to ballast, transformer and wiring

**Fixture Specifications**

Finish: White (std), custom available  
 Weight: Approx. 7 lbs. per linear foot  
 Ceiling Cutout: Refer to Pages 2-3

**Electrical**

- Ambient temperature 100 °F. maximum
- Integral electronic ballast(s), thermally protected and toroidal transformer(s)
- Through branch wiring capable

**Mounting**

- Threaded rod, hanger wire or alternate mounting by others, consult factory

**Options (Consult factory)**

- Lenses: Specify on Page 4
- Occupancy sensor, daylight control module and EM pack
- HVAC, fire sprinkler, surveillance or public address systems integration
- Nippo, Feelux, or Lumilux Seamless lamping

**Photometry:** Consult factory



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

# Single Lamp Configurations

## VRR4

Job Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_










- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

For single MR16 downlight configurations, consult factory.  
 Custom configurations upon request.

For fixture installation dimensions per trim type, follow formula below

Plaster	<b>Furthest extent of tape-in flange</b> Length: OAL + 1.5", Width: 5.125"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flange	<b>Furthest extent of overlap flange</b> Length: OAL + 0.625", Width: 4.25"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flangeless	<b>Opening for Wood/Tile/Decoustic ceilings</b> Length: OAL + 0.125", Width: 3.75"
	<b>CTC Grid spacing for T-Grid/ATC systems</b> Length: OAL + 0.375", Width: 4"

Example: Flangeless 48" (Nom) VRR4 in Decoustic ceiling  
 Length: 47.625" + 0.125" = 47.75" x 3.75" Wide

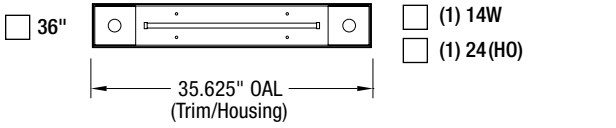

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

## VRR4

Job Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_







- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

For single MR16 downlight configurations, consult factory.  
 Custom configurations upon request.

For fixture installation dimensions per trim type, follow formula below

Plaster	<b>Furthest extent of tape-in flange</b> Length: OAL + 1.5", Width: 5.125"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flange	<b>Furthest extent of overlap flange</b> Length: OAL + 0.625", Width: 4.25"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flangeless	<b>Opening for Wood/Tile/Decoustic ceilings</b> Length: OAL + 0.125", Width: 3.75"
	<b>CTC Grid spacing for T-Grid/ATC systems</b> Length: OAL + 0.375", Width: 4"

Example: Flangeless 48" (Nom) VRR4 in Decoustic ceiling  
 Length: 47.625" + 0.125" = 47.75" x 3.75" Wide

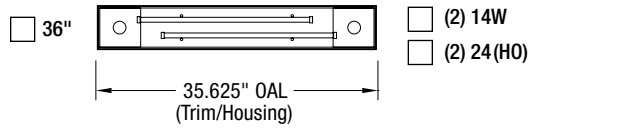

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

VRR4

Job Name:

Fixture Type:

### Fluorescent Options

	Acrylic Lenses	Lens Efficiency	Cat. No.
<input type="checkbox"/>	Frosted (2067-P95)	81%	(standard)
<input type="checkbox"/>	2447-P95	47%	47P
<input type="checkbox"/>	D-Glare, Hi-Def	93%	DH

For other lens options, consult factory.