


Fluorescent Slot, Regressed Lens with MR16 Pinhole Aperture

T5

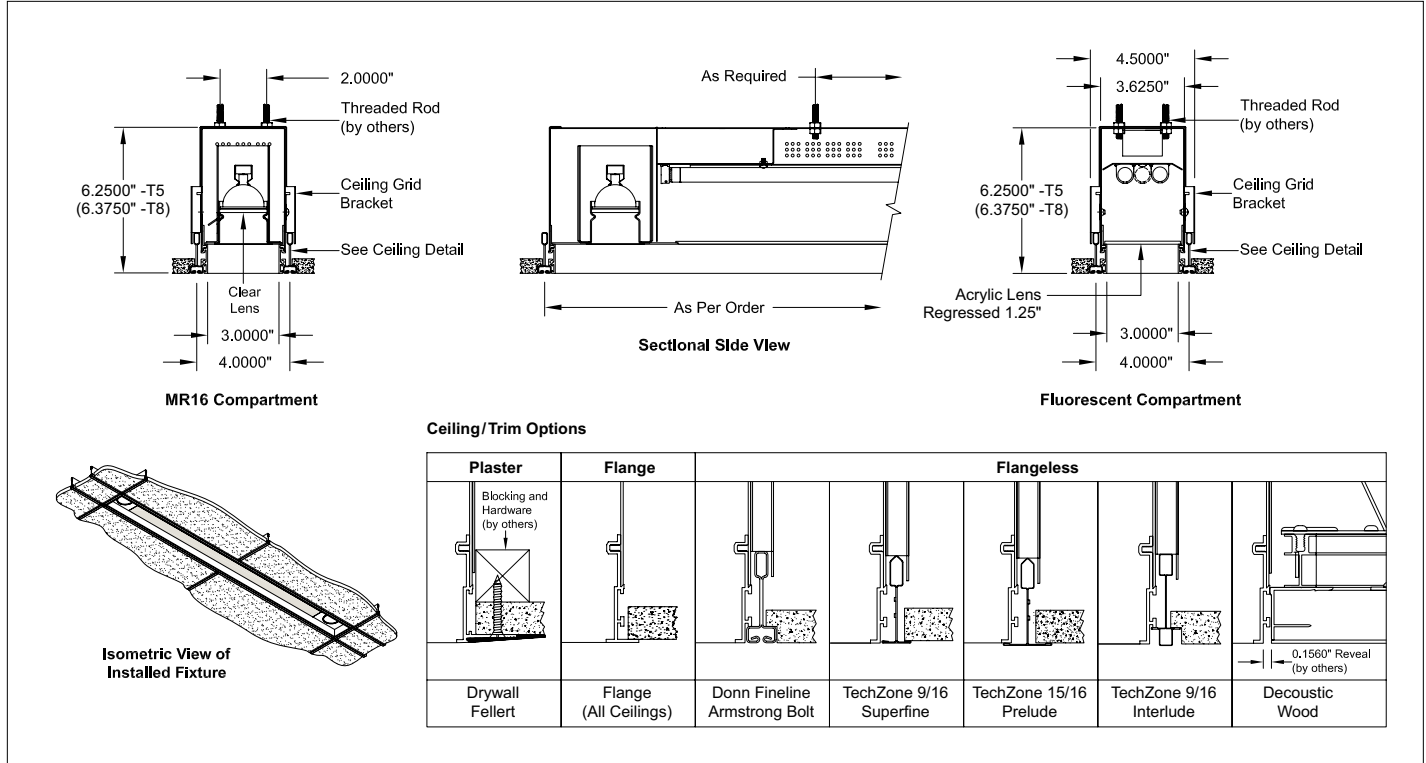

VRR4- M6 - T - - - - W-

of MR16 Lamps MR16 Wattage # of Fluor Lamps in Cross Section Fluor Lamp Wattage Ballast Length Trim Options* Voltage

# of MR16	MR16 Wattage	# of Fluor in Cross Section	Fluor Wattage	Ballast (Specify below)	Length	Trim Options*	Voltage
<input type="checkbox"/> 1	<input type="checkbox"/> 20	<input type="checkbox"/> 1	See Configurations (Pages 2-3)	<input type="checkbox"/> E (Electronic) Std.	<input type="checkbox"/> 36" <input type="checkbox"/> 72"	<input type="checkbox"/> P (Plaster)	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> 2	<input type="checkbox"/> 37	<input type="checkbox"/> 2		<input type="checkbox"/> D (Dimming) †	<input type="checkbox"/> 48" <input type="checkbox"/> 84"	<input type="checkbox"/> F (Flange)	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> 3	<input type="checkbox"/> 50				<input type="checkbox"/> 60" <input type="checkbox"/> 96"	<input type="checkbox"/> X (Flangeless)	
				† Specify Ballast (required)	<input type="checkbox"/> Custom (specify)		

* P=Plaster: For use with Drywall and Fellert.

F=Flange: Suitable for all ceiling types.

X=Flangeless: For use with Donn Finline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

Description

Fluorescent slot with regressed lens and MR16 pinhole aperture.

Features

- Standard Lenses: MR16-clear, Fluorescent-Frosted acrylic
- Shiplapped lenses for sections longer than 96"
- Fixtures fabricated to any length (Refer to Pages 2-3)
- Continuous run length configurations with fully illuminated corners
- Below ceiling access to ballast, transformer and wiring

Fixture Specifications

Finish: White (std), custom available
Weight: Approx. 7 lbs. per linear foot
Ceiling Cutout: Refer to Pages 2-3

Electrical

- Power Consumption: Per specification
- Ambient temperature 100 °F. maximum
- Integral electronic ballast(s), thermally protected and toroidal transformer(s)
- Through branch wiring capable

Mounting

- Threaded rod, hanger wire or alternate mounting by others, consult factory

Options (Consult factory)

- Accessories/Lenses: Specify on Page 4
- Occupancy sensor, daylight control module and EM pack
- HVAC, fire sprinkler, surveillance or public address systems integration.
- Nippo, Feelux, or Lumilux Seamless lamping
- Downlight: Metal halide or LED modules

Photometry: Page 5



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

Single Lamp Configurations

VRR4

Job Name: _____ Fixture Type: _____










- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

For single MR16 downlight configurations, consult factory.
 Custom configurations upon request.

For fixture installation dimensions per trim type, follow formula below

Plaster	Furthest extent of tape-in flange Length: OAL + 1.5", Width: 5.125"
	Ceiling cut out Length: OAL + 0.125", Width: 3.75"
Flange	Furthest extent of overlap flange Length: OAL + 0.625", Width: 4.25"
	Ceiling cut out Length: OAL + 0.125", Width: 3.75"
Flangeless	Opening for Wood/Tile/Decoustic ceilings Length: OAL + 0.125", Width: 3.75"
	CTC Grid spacing for T-Grid/ATC systems Length: OAL + 0.375", Width: 4"

Example: Flangeless 48" (Nom) VRR4 in Decoustic ceiling
 Length: 47.625" + 0.125" = 47.75" x 3.75" Wide

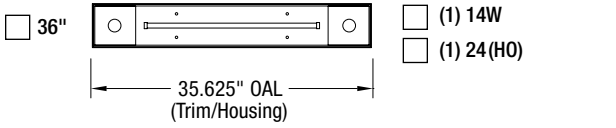

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

VRR4

Job Name: _____ Fixture Type: _____








- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

For single MR16 downlight configurations, consult factory.
 Custom configurations upon request.

For fixture installation dimensions per trim type, follow formula below

Plaster	Furthest extent of tape-in flange Length: OAL + 1.5", Width: 5.125"
	Ceiling cut out Length: OAL + 0.125", Width: 3.75"
Flange	Furthest extent of overlap flange Length: OAL + 0.625", Width: 4.25"
	Ceiling cut out Length: OAL + 0.125", Width: 3.75"
Flangeless	Opening for Wood/Tile/Decoustic ceilings Length: OAL + 0.125", Width: 3.75"
	CTC Grid spacing for T-Grid/ATC systems Length: OAL + 0.375", Width: 4"

Example: Flangeless 48" (Nom) VRR4 in Decoustic ceiling
 Length: 47.625" + 0.125" = 47.75" x 3.75" Wide

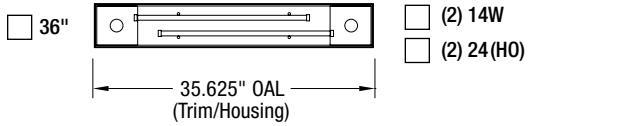

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

VRR4













Job Name: _____ Fixture Type: _____

Fluorescent Options

	Acrylic Lenses	Lens Efficiency	Cat. No.
<input type="checkbox"/>	Frosted (2067-P95)	81%	(standard)
<input type="checkbox"/>	2447-P95	47%	47P
<input type="checkbox"/>	D-Glare, Hi-Def	93%	DH

For other lens options, consult factory.

Point Source Options

	Accessories/Lenses	MR16 Cat. No.
<input type="checkbox"/>	 Solite Spread Lens	SOM6
<input type="checkbox"/>	 Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>	 Prismatic Spread Lens	PRM6
<input type="checkbox"/>	 Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>	 Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>	 Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>	 Flash Opal Lens	FOM6
<input type="checkbox"/>	 Optivex UV Lens	UVM6
<input type="checkbox"/>	 Frosted Clear Lens	FCM6
<input type="checkbox"/>	 Red Filter Lens	RLM6
<input type="checkbox"/>	 Green Filter Lens	GLM6
<input type="checkbox"/>	 Blue Filter Lens	BLM6
<input type="checkbox"/>	 Amber Filter Lens	ALM6
<input type="checkbox"/>	 Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.