


## Linear Recessed Wall to Ceiling Fixture, Flush Snap-in Lens

T5

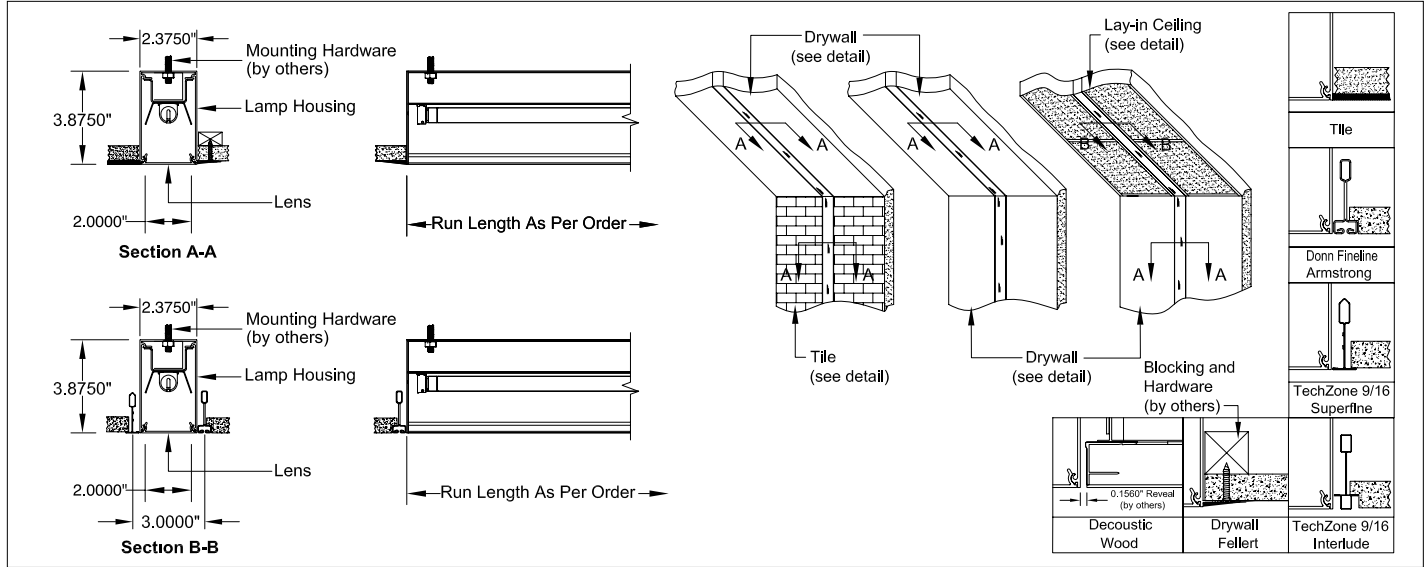

For Corner Ordering Guide, see page 2

### Wall Slot Ordering Guide

WL2-1T \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ -W- \_\_\_\_\_  
 Wattage Ballast Wall Length Wall Trim\* Voltage

### Ceiling Slot Ordering Guide

CL2-1T \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ -W- \_\_\_\_\_  
 Wattage Ballast Ceiling Length Ceiling Trim\* Voltage

Wattage	Ballast (Specify below)	Wall Length	Ceiling Length	Wall Trim*	Ceiling Trim*	Voltage
<input type="checkbox"/> 14	<input type="checkbox"/> E (Electronic) std.	<input type="checkbox"/> 24"	<input type="checkbox"/> 24"	<input type="checkbox"/> P (Plaster Trim)	<input type="checkbox"/> P (Plaster Trim)	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> 21	<input type="checkbox"/> D (Dimming) †	<input type="checkbox"/> 36"	<input type="checkbox"/> 36"	<input type="checkbox"/> F (Flange Trim)	<input type="checkbox"/> F (Flange Trim)	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> 28		<input type="checkbox"/> 48"	<input type="checkbox"/> 48"	<input type="checkbox"/> X (Trimless)	<input type="checkbox"/> X (Trimless)	
<input type="checkbox"/> 35	† Specify Ballast (required)	<input type="checkbox"/> 60"	<input type="checkbox"/> 60"			
		<input type="checkbox"/> 72"	<input type="checkbox"/> 72"			
		<input type="checkbox"/> 84"	<input type="checkbox"/> 84"			
		<input type="checkbox"/> 96"	<input type="checkbox"/> 96"			

\* P=Plaster Trim: For use with Drywall and Fellert.

F=Flange Trim: For ceiling conditions requiring a flange.

X=Trimless: For use with Donn Finline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

### Description

Linear fluorescent recessed wall to ceiling fixture with flush snap-in lens. Single T5 lamp in cross section.

### Features

- Standard Lens: Frosted acrylic
- Fixtures fabricated to any length
- Continuous run length configurations with fully illuminated corners
- Below ceiling access to ballast and wiring
- Integral Thermal Protection

### Fixture Specifications

Finish: White (std), custom available  
 Weight: Approx. 3 lbs. per linear foot  
 Ceiling Cutout: (Spec)"L x 2.500"W  
 Corner Specification: Page 2

### Electrical

- Ambient temperature 100 °F. maximum
- Integral electronic ballast(s), thermally protected
- Through branch wiring capable

### Mounting (See Details)

Fixtures mounted in Lay-in ceilings to be suspended via threaded rod or by alternate mounting means (by others)  
 Contact factory for special conditions

### Options (Consult factory)

- Integral lens puller
- Occupancy sensor, daylight control module and EM pack

Photometry: Consult factory






All designs and scale drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without the expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

## Series WL2

Job Name:

Fixture Type:

### Corner Ordering Guide

Corners Options		Cat. No.
<input type="checkbox"/> 	<b>Flat Corner</b> Common Plane	<b>WL2-FC</b> _____ Specify Angle ° (required)
<input type="checkbox"/> 	<b>Wall to Ceiling</b> Inside Corner	<b>WL2-IC</b> _____ Specify Angle ° (required)
<input type="checkbox"/> 	<b>Ceiling to Wall</b> Outside Corner	<b>WL2-OC</b> _____ Specify Angle ° (required)