
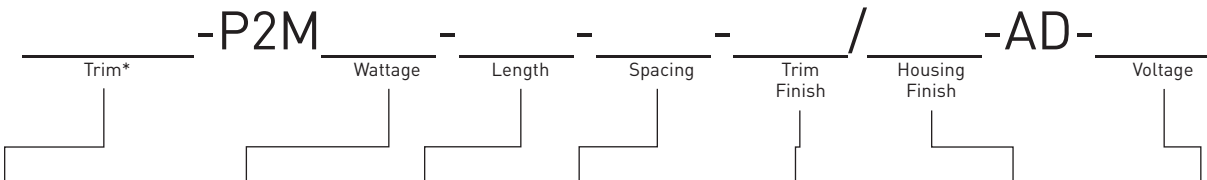


Linear Accentlight, Open Aperture

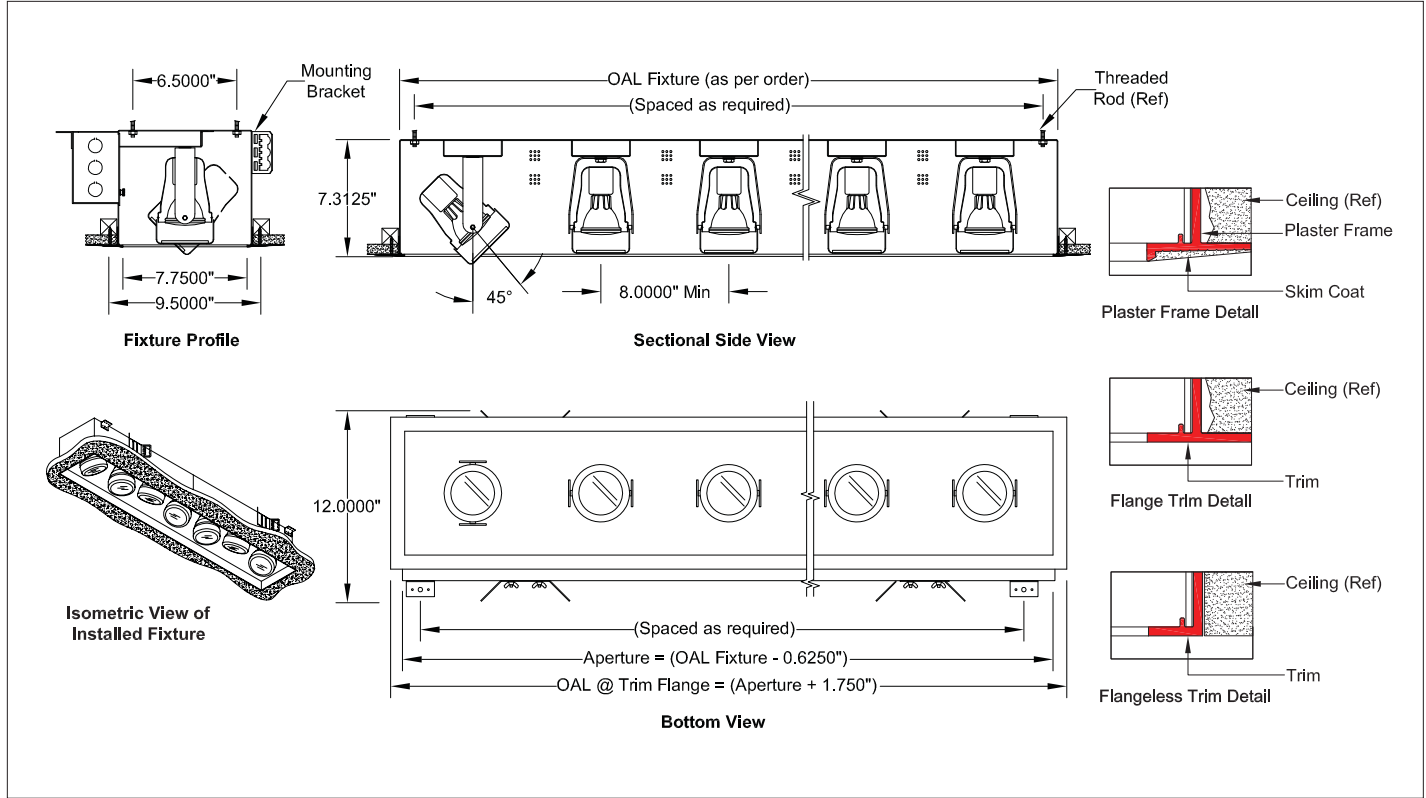

Trim Type*	Wattage	Length	Spacing	Trim Finish	Housing Finish	Voltage
<input type="checkbox"/> VLAP Plaster	<input type="checkbox"/> 20	Specify Length (in inches)	<input type="checkbox"/> 8" Minimum	<input type="checkbox"/> W White	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VLAF Flange	<input type="checkbox"/> 39		<input type="checkbox"/> Custom (Specify)	<input type="checkbox"/> B Black	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> VLAX Flangeless				<input type="checkbox"/> C Custom	<input type="checkbox"/> C Custom	

* P=Plaster: For use with Drywall and Fellert.

F=Flange: Suitable for all ceiling types.

X=Flangeless: For use with Donn Finline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

Description

Linear PAR20 metal halide open aperture accent fixture. Adjustable lampholders. Plaster, flanged or flangeless trim.

Features

- Lengths made-to-measure
- Below ceiling access to transformer and wiring.
- Lampholders are adjustable from 0°-45°.

Fixture Specifications

Finish: Black (std), custom available.
Weight: Approx. 12 lbs./ft.

Electrical

- Power Consumption: 39 watts per lamp.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballasts, thermally protected.
- Through branch wiring capable.

Mounting

- Universal mounting brackets included.
- Contact factory for special ceiling conditions.

Options (Consult factory)

- Lenses: Page 2

Photometry: Consult factory



















All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VLA

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Cross Blade Baffle	XBP2
<input type="checkbox"/>		Hexagonal Louver	HXP2
<input type="checkbox"/>		Solite Spread Lens	SOP2
<input type="checkbox"/>		Frosted Solite Spread Lens	FSP2
<input type="checkbox"/>		Prismatic Spread Lens	PRP2
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPP2
<input type="checkbox"/>		Skytex Linear Spread Lens	SKP2
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKP2
<input type="checkbox"/>		Flash Opal Lens	FOP2
<input type="checkbox"/>		Optivex UV Lens	UVP2
<input type="checkbox"/>		Frosted Clear Lens	FCP2
<input type="checkbox"/>		Red Filter Lens	RLP2
<input type="checkbox"/>		Green Filter Lens	GLP2
<input type="checkbox"/>		Blue Filter Lens	BLP2
<input type="checkbox"/>		Amber Filter Lens	ALP2
<input type="checkbox"/>		Dichroic Filter Lens	DLP2

For other accessory/lens options, consult factory.